




Acople Guillemín Aluminio

Aplicación: Uso industrial, naval y productos abrasivos

Norma : EN 14420-8 / NF E-29572. Aluminio



CODIGO	DESCRIPCIÓN	DN	DISTANCIA ENTRE GARRAS (D)
50071040	DN40-MANG 40Ø	40	55
50071045	DN40-MANG 45Ø	45	
50071050	DN50-MANG 50Ø	50	69
50071070	DN65-MANG 70Ø	65	84
50071075	DN80-MANG 75Ø	80	
50071080	DN80-MANG 80Ø	80	103
50071090	DN80-MANG 90Ø	90	
50071100	DN100-MANG 100Ø	100	123

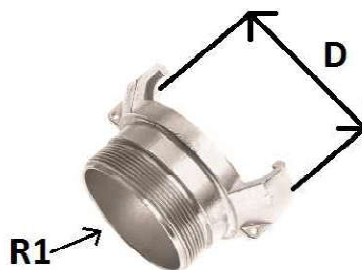

CODIGO	DESCRIPCIÓN	DN	R1	DISTANCIA ENTRE GARRAS (D)
50072076	DN80-MACHO 3" S/CIERRE	80	3"	103
50072100	DN100-MACHO 4" S/CIERRE	100	4"	123



Acople Guillemin Aluminio



CODIGO	DESCRIPCIÓN	DN	R1	DISTANCIA ENTRE GARRAS (D)
50073038	DN40-MACHO 1 1/2" C/CIERRE	40	1 1/2"	55
50073063	DN65-MACHO 2 1/2" C/CIERRE	65	2 1/2"	84
50073076	DN80-MACHO 3" C/CIERRE	80	3"	103
50073099	DN100-MACHO 4" C/CIERRE	100	4"	123



CODIGO	DESCRIPCIÓN	DN	R1	DISTANCIA ENTRE GARRAS (D)
50074038	DN40-HEMBRA 1 1/2" S/CIERRE	40	1 1/2"	55
50074051	DN50-HEMBRA 2" S/CIERRE	50	2"	69
50074076	DN80-HEMBRA 3" S/CIERRE	80	3"	103
50074100	DN100-HEMBRA 4" S/CIERRE	100	4"	123



Acople Guillemín Aluminio



CODIGO	DESCRIPCIÓN	DN	R1	DISTANCIA ENTRE GARRAS (D)
50075038	DN40-HEMBRA 1 1/2" C/CIERRE	40	1 1/2"	55
50075051	DN50-HEMBRA 2" C/CIERRE	50	2"	69
50075065	DN65-HEMBRA 2 1/2" C/CIERRE	65	2 1/2"	84
50075076	DN80-HEMBRA 3" C/CIERRE	80	3"	103
50075100	DN100-HEMBRA 4" C/CIERRE	100	4"	123




CODIGO	DESCRIPCIÓN	DN	Ø EXTERIOR CABEZA
50076040	TAPON DN40- C/CIERRE	40	55
50076050	TAPON DN50- C/CIERRE	50	69
50076065	TAPON DN65- C/CIERRE	65	84
50076080	TAPON DN80- C/CIERRE	80	103
50076100	TAPON DN100- C/CIERRE	100	123

** Consultar para cualquier otra medida.



Acople Guillemín Aluminio

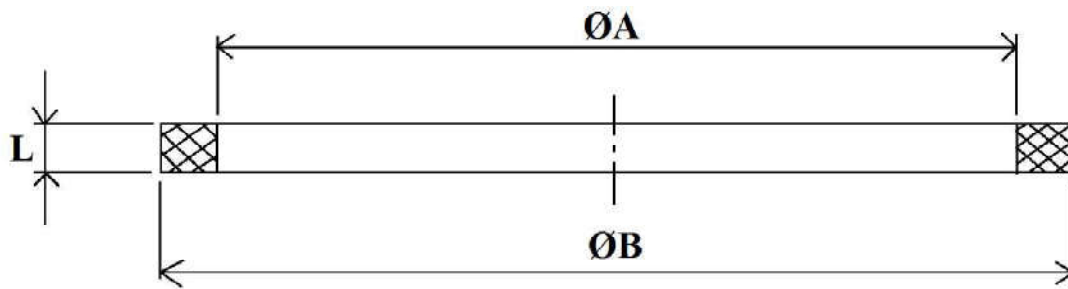

CODIGO	DESCRIPCIÓN	DN	R1	L	ØA	ØB
50077040	JUNTA NBR 1 1/2"	40	1 1/2"	5	43	51
50077050	JUNTA NBR 2"	50	2"	5	54	64
50077065	JUNTA NBR 2 1/2"	65	2 1/2"	6	69	79
50077076	JUNTA NBR 3"	80	3"	6	85	96
50077100	JUNTA NBR 4"	100	4"	7	103,5	117,5