




LIQUIDOS PVC Amarilla

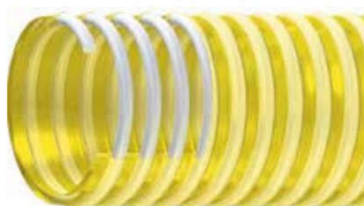

CODIGO	ØINT	ØEXT	PRESION DE TRABAJO (BAR)	PRESION DE ROTURA (BAR)	RADIO CURVATURA	PESO (gr)	LONGITUD
10601020	20	25	8	24	85	240	50
10601025	25	30	7	22	105	290	50
10601030	30	35	7	21	120	345	50
10601032	32	37	6	20	125	370	50
10601035	35	41	6	19	138	415	50
10601040	40	46	6	18	157	505	50
10601045	45	51	6	17	186	570	50
10601050	50	57	6	15	205	700	50
10601060	60	67	4,5	13	248	825	50
10601070	70	77	4	12	295	1100	50
10601075	75	82	4	12	320	1250	50
10601080	80	89	4	12	334	1400	50
10601090	90	100	4	11	395	1650	30/50
10601100	100	111	4	11	430	1850	30
10601110	110	122	3,5	10	475	2200	30
10601125	125	137	3,5	10	630	3000	30
10601150	150	164	3	9	715	3700	30
10601200	200	216	2	6	900	5950	30

Aplicación: Aspiración y conducción de líquidos en industria y agricultura

Composición: Tubo: Superficie lisa en PVC.

- Refuerzo: PVC antichoque.
- Cubierta: Semi liso en PVC resistente a la abrasión y agentes atmosféricos

Rango de temperaturas: -5°C / +60°C